



Self-supporting steel insulated panel with polyurethane core, with 5 ribs, designed for roofs with a minimum slope of 7%.

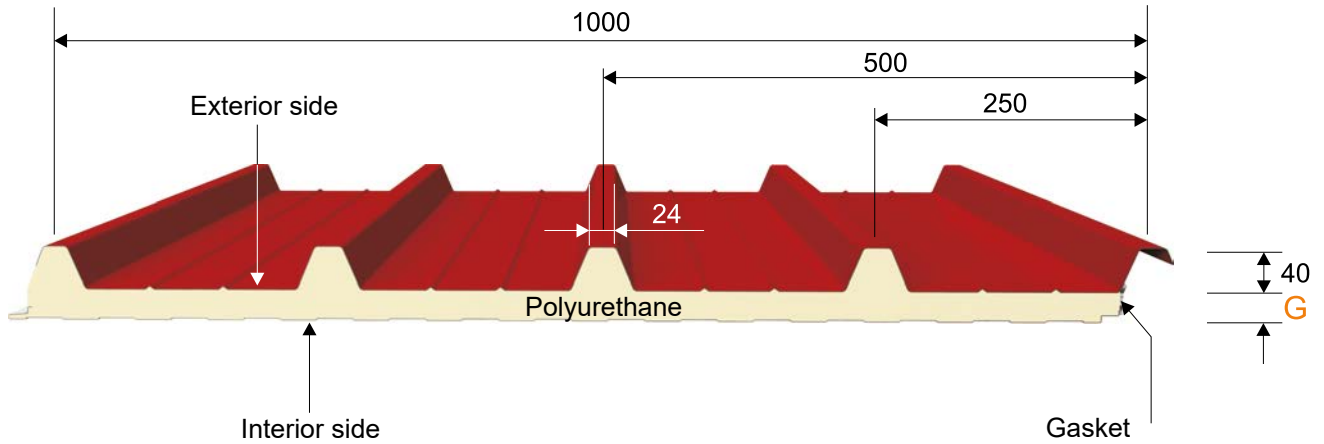


Upon request, there can be produced thermo-insulated panels of polyisocyanurate (PIR) foam, with fire resistance.

### Table of permissible loads\*\*

Maximum values guaranteed for the distances (l), between two supports for a panel with a 0,5 mm thick steel exterior side, and 0,4 mm thick steel interior side - subjected at uniform distributed loads (p)




G (mm)	Loadings (daN/m <sup>2</sup> )							
	60	80	100	120	150	200	250	300
30	3,70	3,30	2,90	2,50	2,00	1,50	1,20	1,00
40	4,15	3,75	3,35	3,05	2,65	2,05	1,65	1,35
50	4,65	4,20	3,65	3,35	2,95	2,40	2,05	1,70
60	5,10	4,60	4,15	3,75	3,30	2,75	2,40	2,05
80	6,05	5,45	5,05	4,60	4,00	3,40	2,90	2,60
100	6,95	6,25	5,75	5,15	4,65	3,95	3,40	3,05
120	7,75	6,95	6,35	5,95	5,20	4,45	3,85	3,50
150	8,90	8,10	7,40	6,90	6,20	5,30	4,70	4,20




G (mm)	Loadings (daN/m <sup>2</sup> )							
	60	80	100	120	150	200	250	300
30	4,05	3,65	3,20	2,75	2,20	1,65	1,30	1,10
40	4,50	4,15	3,70	3,35	2,90	2,25	1,80	1,50
50	5,10	4,60	4,00	3,70	3,25	2,65	2,25	1,85
60	5,60	5,05	4,55	4,15	3,65	3,05	2,65	2,25
80	6,65	6,00	5,55	5,05	4,40	3,75	3,20	2,85
100	7,65	6,90	6,35	5,65	5,10	4,35	3,75	3,35
120	8,55	7,65	7,00	6,55	5,70	4,90	4,25	3,85
150	9,80	8,90	8,15	7,60	6,80	5,85	5,15	4,60

### Table of permissible loads\*\*

Maximum values guaranteed for the distances (l), between two supports for a panel with a 0,5 mm thick steel exterior side, and 0,5 mm thick steel interior side - subjected at uniform distributed loads (p)




G (mm)	Loadings (daN/m <sup>2</sup> )							
	60	80	100	120	150	200	250	300
30	3,60	3,05	2,70	2,45	2,00	1,50	1,20	1,00
40	4,10	3,60	3,20	2,90	2,50	2,05	1,65	1,35
50	4,65	4,15	3,65	3,30	2,90	2,40	2,05	1,70
60	5,15	4,65	4,15	3,70	3,25	2,75	2,35	2,05
80	6,10	5,50	5,00	4,55	4,00	3,40	2,95	2,55
100	6,85	6,30	5,75	5,15	4,70	3,95	3,45	3,05
120	7,75	7,00	6,40	5,95	5,25	4,50	3,90	3,50



G (mm)	Loadings (daN/m <sup>2</sup> )							
	60	80	100	120	150	200	250	300
30	3,95	3,35	3,00	2,70	2,20	1,65	1,30	1,10
40	4,50	3,95	3,50	3,20	2,75	2,25	1,80	1,50
50	5,10	4,55	4,00	3,65	3,20	2,64	2,25	1,85
60	5,65	5,10	4,55	4,05	3,60	3,05	2,60	2,25
80	6,70	6,05	5,50	5,00	4,40	3,75	3,25	2,80
100	7,55	6,95	6,35	5,65	5,15	4,35	3,80	3,35
120	8,55	7,70	7,05	6,55	5,80	4,95	4,30	3,85

\*\*The company reserves the right to make the necessary modifications or improvements to its products, at any time, without being subject to prior notice.

## Roof Panel

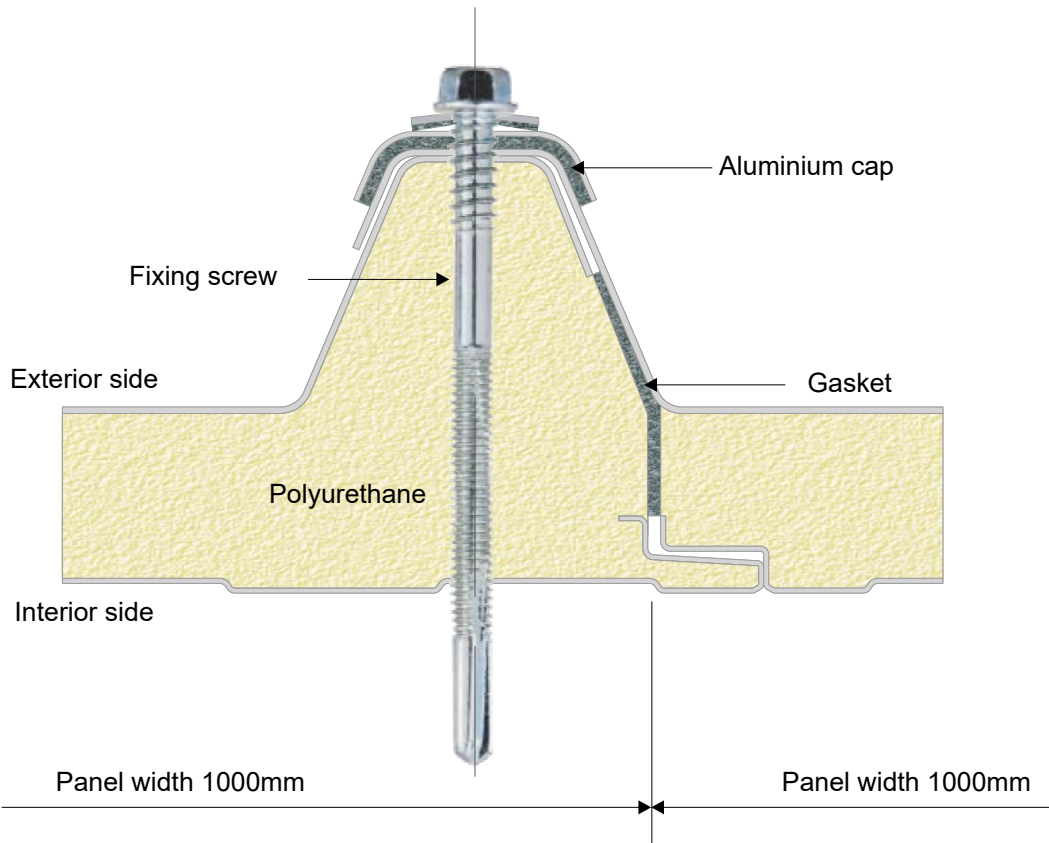

STEEL (0.5mm) – STEEL (0.4 mm) PANEL WEIGHT		THERMAL TRANSFER COEFFICIENT (K)	
G	M	K	
(mm)	(kg/m <sup>2</sup> )	(kcal/m <sup>2</sup> h °C)	(W/m <sup>2</sup> K)
30	9,69	0,46	0,54
40	10,09	0,37	0,43
50	10,49	0,31	0,36
60	10,89	0,28	0,32
80	11,69	0,21	0,24
100	12,49	0,16	0,19
120	13,29	0,15	0,17
150	14,51	0,13	0,14

STEEL (0.5 mm) – STEEL (0.5 mm) PANEL WEIGHT		THERMAL TRANSFER COEFFICIENT (K)	
G	M	K	
(mm)	(kg/m <sup>2</sup> )	(kcal/m <sup>2</sup> h °C)	(W/m <sup>2</sup> K)
30	10,52	0,46	0,54
40	10,92	0,37	0,43
50	11,32	0,31	0,36
60	11,72	0,28	0,32
80	12,52	0,21	0,24
100	13,32	0,16	0,19
120	14,12	0,15	0,17

### Permissible Loads\*\*

The table contains the free admissible sizes (l) in meters, corresponding to each uniformly distributed load (p), calculated based on experimental data, so as to guarantee a maximum arrow (f) less (no more than) than l/200, considering a safety coefficient (upon breaking stress when bending) greater than or equal to 3.

### Thermal transfer coefficients

The values were determined in an authorized laboratory, using the value of lambda thermal conductivity (measured at 10°C) of 0.021 W/mK (0.017 kcal/mhC), according to EN 12667:2002.

\*\*The company reserves the right to make the necessary modifications or improvements to its products, at any time, without being subject to prior notice.